


SRG Series

Miniature Rigid Coupling

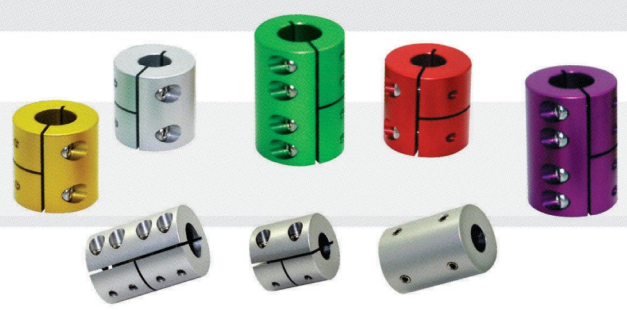

The compact accurate RIGID COUPLING of SI is one-piece structure. RIGID COUPLING can be used as joint to connect with two shafts. The major characteristic of RIGID COUPLING is that it provides perfect efficiency at any condition that is low and high speed and high torque but that is not flexible. RIGID COUPLING is not accepted amplitude eccentricity and misalignment between one shaft and the other shaft. Therefore please arrange the shaft perfectly for protection of coupling and machinery.

Features

- Zero backlash
- Maintenance free and excellent resistance against oil and chemicals.
- Light weight, extremely low inertia.
- Can be used as a joint to connect with two shafts




Structure & Material

SRG - ■ ■



(SET SCREW TYPE)

SRG - ■ ■ C



(CLAMP TYPE)

SRGL - ■ ■ C



(LONG CLAMP TYPE)

Body : Aluminum Alloy and Anodizing

How to order product

SRG - 25C

φ 6

×

φ 8

Product No.

Shaft Dia

Shaft Dia

※ Please, specify the diameters of both shaft ends in the order form.

